



NEW


The Turbo 390

Engine Air Intake Pre-Cleaner



- **80% pre-separation efficiency***
at 500 CFM and 5" H₂O restriction!
14 m³/min & 12.4 mBar
- **Durable, glass-filled nylon construction.**

**tested according to ISO 5011, J726 Standard*

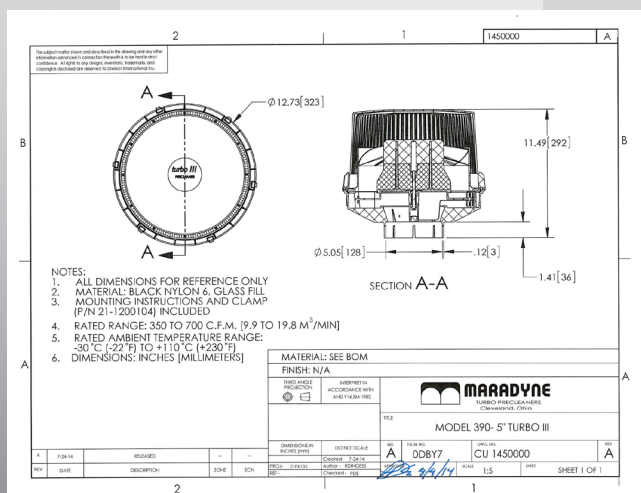



MARADYNE Corporation

Made in Cleveland, Ohio, U.S.A. by:

MARADYNE CORPORATION (HQ)
4540 West 160th Street, Cleveland, OH 44135
216.362.0755 phone | 800.537.7444 toll free
216.362.0799 fax
email: sales@turboprecleaner.com

turbo® PRECLEANER

MARADYNE Corporation

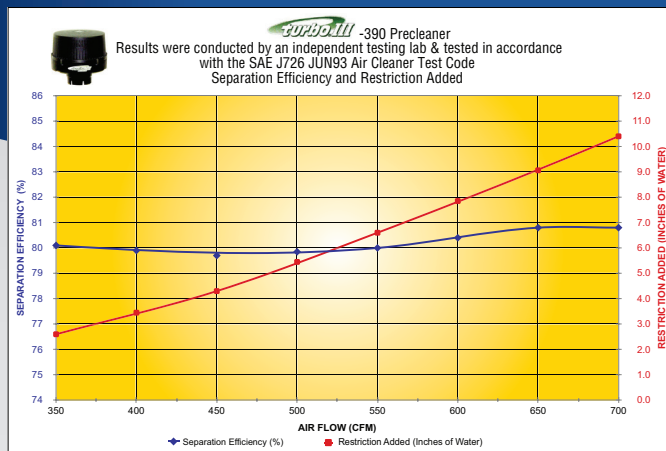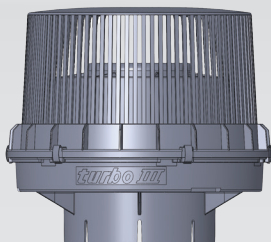

Model Specifications

turbo® II

- Durable steel construction
- Highest efficiency
- Spinner/bearings lifetime warranty
- **The Original: The Best**

turbo® II				
Airflow range			Inlet size base	
Model	CFM	m3/min	Inches	mm
24	100-250	2.8-7.1	3" or 4"	76 or 102
35	250-350	7.1-9.9	4.5"	114
46	300-700	8.5-19.8	4.5", 5", 6"	114, 127, 152
68	700-1100	19.8-31.1	5", 6", 7", 8"	127, 152, 178, 203

All turbo® II models are available with a raincap or with a bull-nose • Material: Metal with powdercoat finish • Adaptors available

turbo® III

- Lighter and smaller
- Lower restriction
- Higher efficiencies
- Durable glass-filled nylon construction

NEW! →

turbo® III				
Airflow range			Inlet size base	
Model	CFM	m3/min	Inches	mm
15	15-85	0.4-2.4	2"	51
50	50-250	1.4-7.1	3" or 4"	76 or 102
200	200-500	5.6-14.2	4.5" or 5"	114 or 127
390	350-700	9.8-19.8	5", 6", 7"	127, 152, 178
500	500-1100	14.2-31.1	6", 7", 8"	152, 178, 203

All turbo® III models are available with raincap • Material: Polymer, 30% glass filled, engineered nylon

turbo® PowerRam

Airflow range			Inlet size base	
Model	CFM	m3/min	Inches	mm
L	500-1500	14.2-42.5	6", 7", 8"	152, 178, 203

